

# TEMPERATURE CONTROLS

## Strap-on pipe thermostat




CODE	TEMPERATURE RANGE	DIFFERENTIAL* K	ADMISSIBLE BODY TEMPERATURE	MAXIMUM BULB TEMPERATURE
C01A	20 ÷ 90 °C	8	120 °C	120 °C
C01B	10 ÷ 60 °C	8	120 °C	120 °C
C01AM	20 ÷ 90 °C	8	120 °C	120 °C
C01ARI	20 ÷ 90 °C	8	120 °C	120 °C

303298LA G1/2 cable gland in V0 self-extinguishing, shockproof thermoplastic material for output connections

\* The differential is to be deducted from the range value.

- SPDT contact rating 15(6)A 250V~.
- AGcdO contacts.
- Faston connections.

IP40

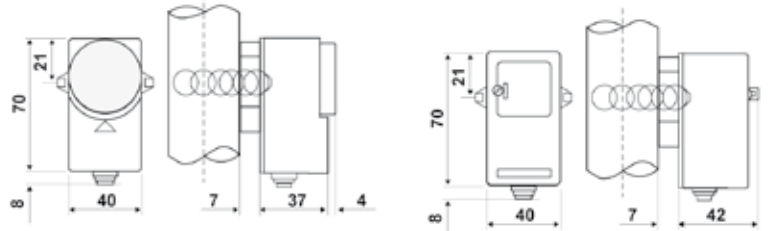

■ C01...

■ C01ARI

## Rear panel thermostats for remote mounting



CODE	TEMPERATURE RANGE	DIFFERENTIAL* K	ADMISSIBLE BODY TEMPERATURE	MAXIMUM BULB TEMPERATURE	CAPILLARY LENGTH mt
C02A3	10 ÷ 90 °C	6 ± 1	120 °C	150 °C	1
C02B3	50 ÷ 300 °C	8 ± 2	120 °C	350 °C	1,5
C02C2	- 20 ÷ 40 °C	2 ± 0,5	60 °C	80 °C	1,5
C02D2	- 35 ÷ 20 °C	2 ± 0,5	50 °C	80 °C	1,5
C02E3	40 ÷ 120 °C	6 ± 2	120 °C	150 °C	1
C02F	50 ÷ 320 °C	10 ± 2	120 °C	330 °C	1

\* The differential is to be deducted from the range value.

2554972 Metallic ring for thermoplastic control knobs.

2754975 Metallic ring for stainless steel control knobs.

2724259 Control knob for C02A3

2724260 Control knob for C02B3

2723094 Control knob for C02C2

2723095 Control knob for C02D2

2724261 Control knob for C02E3

2723856 Control knob for C02F

5677050 Group of range limiters, used for knobs

G28 Copper sheath Gc 1/2 PN10 bar, length 177 mm, including spring to mount the capillary

G23 Seal cap Gc 1/2, PN10 bar, without casing for C02-C04-C09

- SPDT contact rating 15(6)A 250V~.
- AGcdO contacts.
- Faston connections.

IP00



	L	D
C02A3	69	6,5
C02B3	65	5
C02C2	144	6
C02D2	144	6
C02E3	69	6,5
C02F	195	3,5

