

# TANK LEVEL INDICATORS

## .....Push Button Self Closing Valve in Bronze.....

The push button self-closing isolating valves keep the gauge isolated from main stream supplies or storage tanks until the button is pressed to take a level reading.


Generally used for small oil and fuel tanks in the marine, and Industrial sector. The push button self-closing isolating valves prevents leakage in the event of a tubular glass break.

### Features & Benefits

- prevent leakage in the event of a tubular glass break.
- tubular glass or Lexan tube in any length required.
- the centre to centre size is required when tube and protector are to be supplied.
- Pressure range: up to 16 Bar (only valves).
- Temperature Range: 0°C to 100°C (only valves).

### Optional

- tube guard protector.
- spare sealing rings.
- threaded flanges on request.

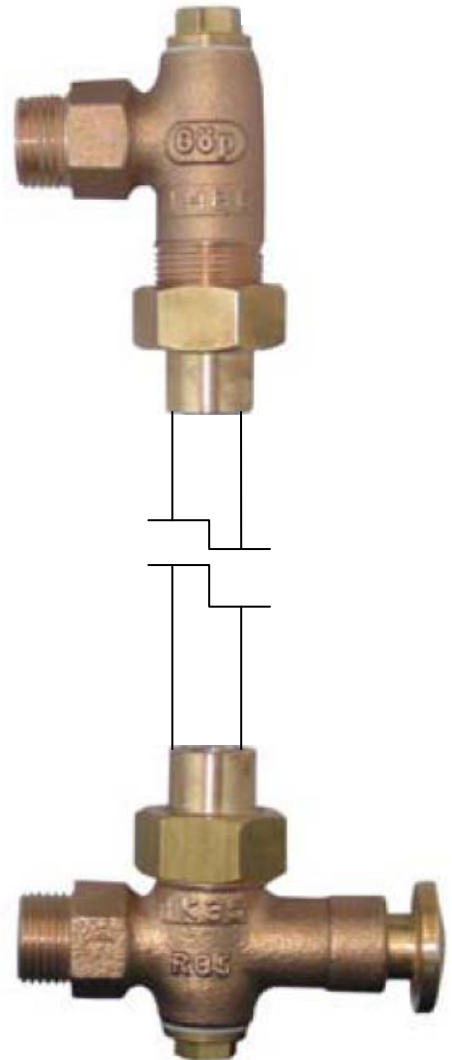

Body Bronze..... LG2

Screw..... Brass


Gland & Gland Nut... Brass

Stem & Push Button Brass

Spring..... Stainless Steel

O-Ring..... FPM

Plug Washer..... PTFE

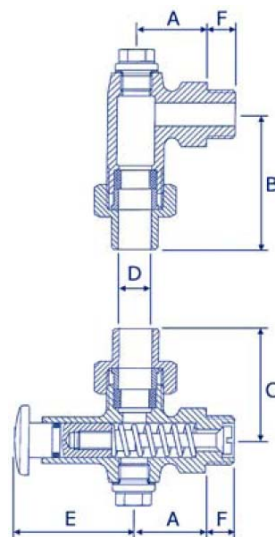

Connection..... ½ BSP (DN15)

Tube diameter 12 mm

A..... 30 mm

B..... 58 mm

C..... 48 mm

D..... 13.5 mm

E..... 51 mm

F..... 12 mm