


**BAR STOCK MANIFOLD
MOD. M241**

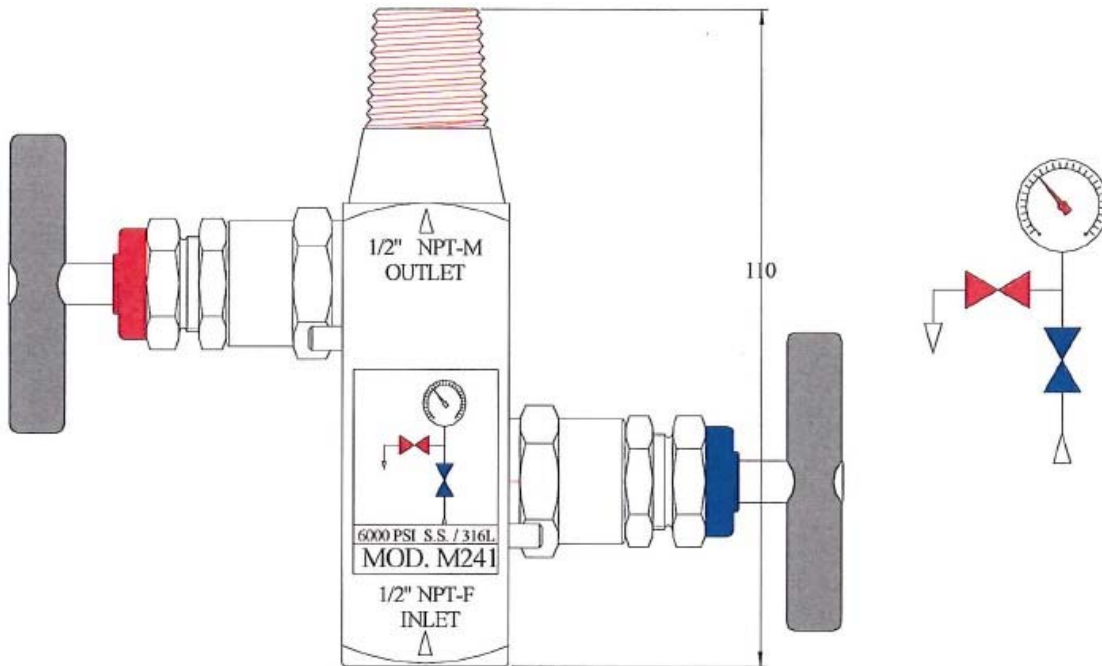

This manifold is used for connect a static pressure instrument to process fluid. Composed of primary block valve and secondary valve for instrument venting or calibrating

Technical specifications

Bar stock body with outside screwed bonnet

Connections : 180°

Inlet : 1/2" NPT-F

Outlet : 1/2" NPT-M

Drain thread 1/4" NPT-F

Other thread on request

Nominal operating pressure :

S.3000 Psi - S.6000 Psi - S.10000 Psi

210 Kg/cm² - 420 Kg/cm² - 690 Kg/cm²

Packing material PTFE as standard max temperature

180 °C. For temperature until 500°C, in Graphoil

Orifice size 5.5 mm

Material : AISI 316/316L

Other material on request

How to order						
Model	Rating	Material	Packing	Inlet	Outlet	Drain
M241	●	●	●	1/2" NPT-F	1/2" NPT-m	1/4" NPT-F
●	3 = S.3000	6 = S.6000	10 = S.10000			
●	S = 316/316L	M = Monel	A = 6Mo	N = Hast. C276	H = Hight Duty Bronze	
●	T = Teflon	G = Graphoil				
Example : M241-3-S-T-1/2"-1/2"-1/4"						