


LZM-G Series Acrylic



LZM-G Series flowmeter technical parameters

Model	Range			Thread	Accuracy
	GPM	LPM	Nm3/h		
LZM-10G		5-45LPH 6-60LPH 10-100LPH 16-160LPH		G1/2"	±4%
LZM-15G	0.1-1	0.5-4	0.8-8 1-10 1.6-16 2.5-25 4-40	G1/2"	
	0.2-2	1-7			
	0.5-5	1.8-18			
LZM-20G	1-10	4-36	6-60	G3/4"	
		100-1000LPH			
LZM-25G	1-10	4-36	6-60 10-100 15-140 16-160 25-250 35-350 80-400	25G G1" 40G G1 1/2"	
		1-15			
LZM-40G	2-20	10-70			
	5-30	20-100			
	5-40	20-150			
	5-45	20-170			
	20-60	80-220			
LZM-50G	20-80	80-300	100-500 120-600 300-850 400-1200 500-1400	G2"	
	20-100	80-360			
	40-120	150-450			
	50-150	190-560			
	60-200	220-750			

LZM-G Series flowmeter technical parameters

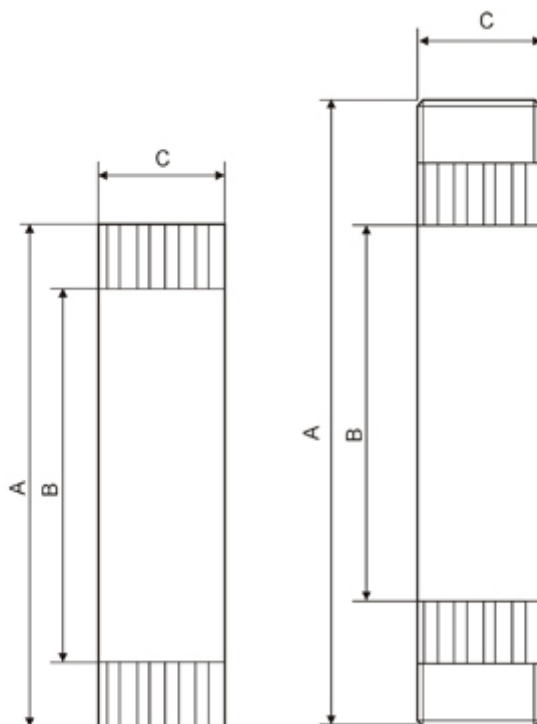

LZM-G series of pipeline flow meter Dimensions

Model	Size (mm)		
	A	B	C
LZM-15G	210	180	32
LZM-20G	278	236	45
LZM-25G	265	235	51
LZM-40G	306	235	51
LZM-50G	380	270	75

LZM-G Series flowmeter parts material code

Float	Float material	O-ring
1.ABS 2.PP 3.PVC 4.Brass 5.Brass chromeplate 6.SS	1-SS	1.Silicon rebber 2.Fluorin rubber