



Model 443

Model 543

Model 444

To extract saturated or super-heated medium or low-pressure steam condensates.

Applicable to: steam piping, ironing machines, washing machines and dry cleaners, tanks and recipients with condensate discharges, cookers, sterilisers, exchangers, multi-daylight presses, vulcanisation autoclaves, calenders, pressure reducing equipment, etc.

Mod. 444 provided with centring ring for placing between flanges in accordance with standards EN, DIN, UNE, ANSI, BS, etc. DN-15 to 25.

**Specifications** 


- Operates via a thermostatic valve that opens the way to cold air and water and condensates but which closes in the
  presence of condensates on the point of vapourising.
- Made entirely of stainless steel to resist wear, temperatures and corrosion. Fully recyclable.
- Long life cycle with high operating efficiency.
- Very simple three-part design to enable easier and faster maintenance than with other similar purgers.
- Simple to install, can be mounted in any position.
- Compact, robust. Much smaller and lighter than conventional purgers.
- Interior body designed for the required capacities in each case and to avoid over-dimensioning.
- Service conditions and flow direction markings on body.
- Continuous discharge.
- Also ideal for air elimination.
- Precise opening and closing, preventing steam losses.
- Totally silent.
- Insensitive to vibration, water hammers, reheated steam, corrosive condensate and icy conditions, etc.
- Protective shut-off surface filter designed to work at the same rate all over the surface. Guarantees a much higher filtering capacity than its competitors. Simple and fast access to filter.
- Treated closing surfaces, which are grinded, lapped and burnished in order to achieve a degree of water-tightness that even exceeds EN 12266-1 requirements.
- All purgers are rigorously tested and verified.
- Each component is numbered, registered and monitored. If previously requested, all the certificates for materials, castings, tests and performances will come with the purger.
- Mod. 444 with reduced assembly length in accordance with EN-558, basic series 49. Purger is provided with one single centring ring in accordance with the following standards: EN, DIN and UNE (PN-6, 10, 16, 25, and 40), ASA (ANSI) (PSI-150 [except for DN-15], 300) and others (NF, BS, etc.).

## IMPORTANT

On order:

- Option for manufacturing in other materials for special working conditions (high temperatures, fluids, etc).
- Other connections.
- Insulating jackets to prevent radiation losses caused mainly by inclement weather conditions.
- The thermostatic element operates at 12° C below the temperature of the saturated steam.
   Elements at 6° C or 24° C can be supplied on request.


		MATERIAL			
N°. PART	PART	MODEL 443	MODEL 543	MODEL 444	
		STAINLESS STEEL			
1	Body	Stainless steel (EN-1.4301)			
2	Centring ring	Stainless steer (EN-1.4301) Stainless steel (EN-1.4310)			
3	Seat			Stainless steel (EN-1.4301)	
4, 18	Filter	Stainless steel (EN-1.4301)			
5	Connection	Stainless steel (EN-1.4308)			
6	Angular connection	Stainless steel (EN-1.4308)			
7	Fixed base	Stainless steel (EN-1.4301)			
8	Fastening clip	Stainless steel (EN-1.4301)			
9	Washer	Stainless steel (EN-1.4301)			
10	Thermostatic element base	Stainless steel (EN-1.4301)			
11	Shut-off	Stainless steel (EN-1.4021)			
12	Membrane	Stainless steel (EN-1.4301)			
13	Thermostatic element cover		Stainless steel (EN-1.4301)		
14	Seal	PTFE (Teflon)			
15	Screw	Stainless steel (EN-1.4301)			
16	Nut	Stainless steel (EN-1.4401)			
17	Washer	Stainless steel	1 /		
R		1/4" to 1" (GAS,NPT,SW)	1/2"(GAS,NPT,SW)		
	DN	15 to 25 (EN, ANSI)			
SERVVICE CONDITIONS	PN	40			
	MAX. ACCEPTABLE TEMPERATURE IN °C	300			
	MAXIMUM SERVICE PRESSURE IN bar	22			
0.0	MAX. SERVICE TEMPERATURE IN °C	250			
	13	1 14 Mod. 44	3 - 543	Mod. 444	

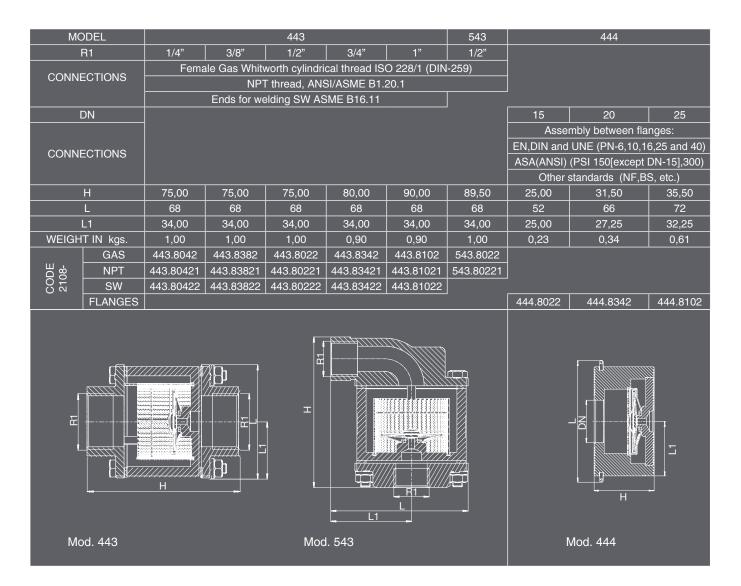

## **Operating principles**

The thermostatic action of the balanced pressure element enables condensate and cold air to leave freely when starting up.


When the condensate temperature reaches that of saturation, the element closes and blocks the steam. When the condensate cools, the elements opens and evacuates it. When steam is on the point of appearing, the cycle is repeated and the element closes, and so on.





Air.


Condensate.


Steam.












Open

Starts to close

Completely closed

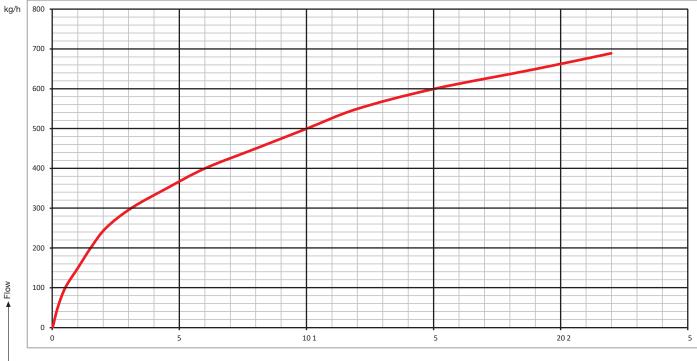



→ Δp bar pressure differential

Flow diagram

DIMENSIONAL COMPARISON OF CONVENTIONAL FLANGE THERMOSTATIC PURGER AND THERMOSTATIC PURGER				
	Conventional flange thermostatic purger	Thermostatic purger Mod. 444		
Distance	165	35,5		
Weight	4 kgs.	0,6 kgs.		
Filtering capacity		Similar (1)		
Maintenance		30% faster		

(1) The filtering capacity of Mod. 443 is 400% higher.

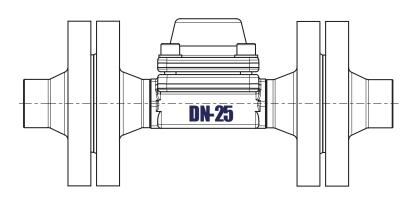



Mod. 444



Informative brochure, without obligation and subject to our General Sales Conditions.