


# Accessories

## Manifold bolts

Bolt threaded 7/16" - 20 UNF for manifold mounting on pressure or differential pressure instruments.

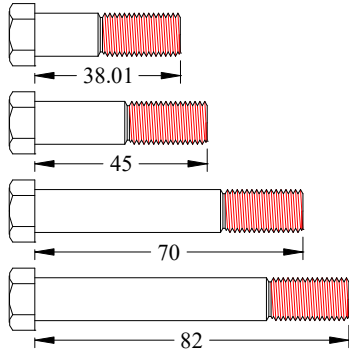

Model	L mm	Material
VT38-S	38.01	Aisi 316L
VT38-C	38.01	Carbon Steel Galv.
VT45-S	45	Aisi 316L
VT45-C	45	Carbon Steel Galv.
VT70-S	70	Aisi 316L
VT70-C	70	Carbon Steel Galv.
VT82-S	82	Aisi 316L
VT82-C	82	Carbon Steel Galv.

### Model VT-38

Bolt for oval flange mounting :

Mod. FO-P / FO-PS.

### Model VT-70

Bolt for flanged manifold mounting :

Mod. M28/M33/M35/M53

### Model VT-45

Bolt for flanged manifold mounting :

Mod. M26/M27/M32/M34/M52

### Model VT-82

Bolt for special use.

## Manifold O-Rings

<p><b>Model GM-T</b></p> <p>Rectangular side O-Ring for flanged manifold mounting :</p> <p>Mod. M26/M27/M28/M32/M33/M34/M35/M52/M53</p>	<p><b>Material</b></p> <p>PTFE GLASS CHARGED</p>	
<p><b>Model GM-G</b></p> <p>Rectangular side O-Ring for flanged manifold mounting :</p> <p>Mod. M26/M27/M28/M32/M33/M34/M35/M52/M53</p>	<p><b>Material</b></p> <p>GRAPHOIL</p>	
<p><b>Model GM-V</b></p> <p>Round side O-Ring for flanged manifold mounting :</p> <p>Mod. M26/M27/M28/M32/M33/M34/M35/M52/M53</p>	<p><b>Material</b></p> <p>VITON</p>	
<p><b>Model LM-S</b></p> <p>Lozenge side O-Ring for flanged manifold mounting :</p> <p>Mod. M26/M27/M28/M32/M33/M34/M35/M52/M53</p>	<p><b>Material</b></p> <p>S.S./316L</p>	