

FEATURES

- With Flexible Cable
- Various designs of Hot ends

APPLICATION

- Bearing temperature
- Turbines


Bearing



STANDARD SPECIFICATIONS

Element	:	Pt-100, class B
Range	:	-200...400°C
Wire combination	:	Simplex, 3 Wire
Sheath material	:	AISI 316 SS
Sheath diameter	:	6.0 mm
Element length	:	25 mm
Lead wire length	:	3000 mm
Lead Wire type	:	PTFE / PTFE / SS Braided Lead wires

DIMENSIONAL DRAWING

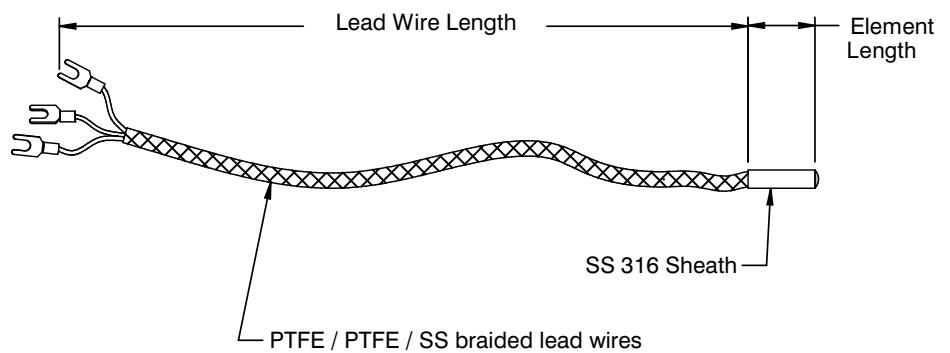

REFERENCE

IEC-751 / DIN 43760

ORDERING CODES

1. ELEMENT

0	Pt100, class A
1	Pt100, class B
2	Pt500, class A
3	Pt500, class B
4	Pt1000, class A
5	Pt1000, class B

1

5. SHEATH DIAMETER

M30	3.0 mm ²
M50	5.0 mm
M60	6.0 mm
M80	8.0 mm

M60

2. RANGE

97C -200...400°C

97C

6. ELEMENT LENGTH (EL)

XXXXX Up to 50 mm

XXXXX

7. LEAD WIRE LENGTH (WL)

XXXXX Up to 25,000 mm

XXXXX

3. WIRE COMBINATION

A	Simplex, 2-Wire
C	Simplex, 3-Wire
D	Simplex, 4-Wire
F	Duplex, 2-Wire
H	Duplex, 3-Wire
I	Duplex, 4-Wire

C

8. COLD END TERMINATION

KP	PTFE insulated
KQ	PTFE / PTFE insulated
KR	PTFE / PTFE / SS braided
K5	FG / FG / SS braided
KV	PTFE / PTFE / Silicon Rubber insulated

KR

4. SHEATH MATERIAL

MF	AISI 316 SS
MG	AISI 316L SS

MF

9. OTHER OPTIONS

TB	Calibration Certificate
XF	Tag plate, AISI 304 SS

XX

Ordering Example : R204-1-97C-C-MF-M60-XXXXX-KR

NOTES:

1. Other sheath diameters, materials and connections are available, please contact factory for details.
2. Not available in Double, 4-Wire combinations.