


SERIES LS-32-090

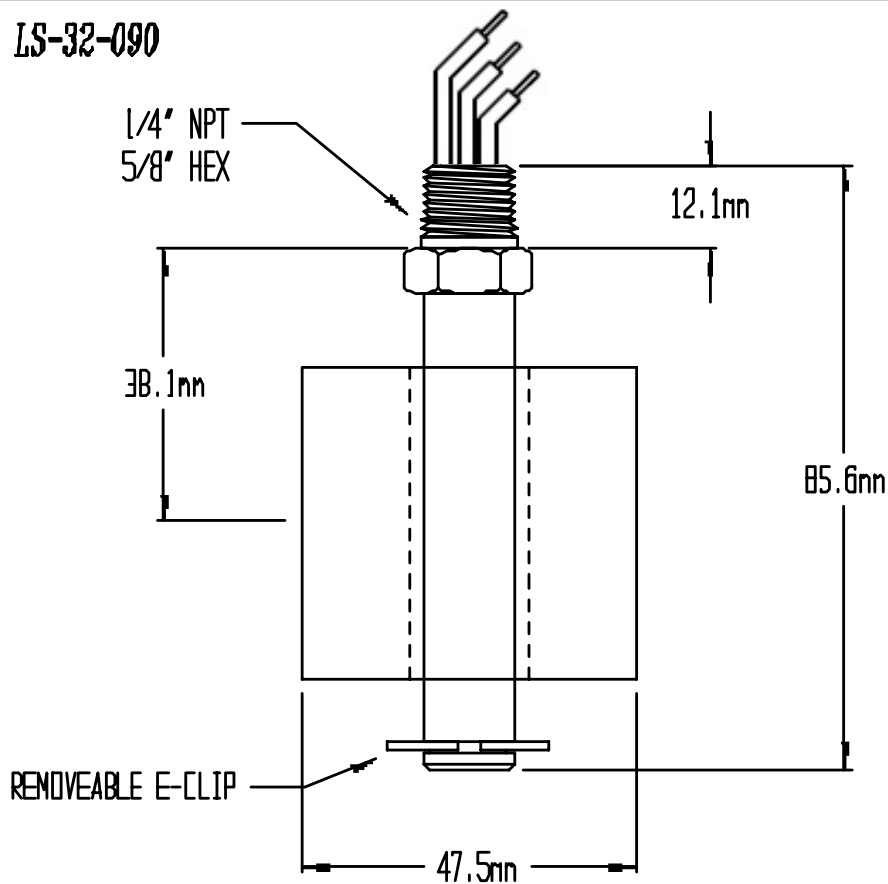

RETAINER: BERYLLIUM COPPER

STEM: BRASS

FLOAT: BLINA-N

MIN SP.GR: D.4D

OPERATING TEMP: WATER -40°F TO 180°F (-40 TO 82°C)

OIL -40°F TO 230°F (-40 TO 110°C)

MAX PRESSURE: 150 PSI (10 BAR)

REED SWITCH

10D VA SPDT

PART#

LS-32-097

U.L. RECOGNIZED FILE# E177423


LEAD WIRES: 20 AWG PVC 24" (100 cm)

SWITCH OPERATION: N.O./N.C.

BLK-COMMON

RED-N.O. GRN-

N.C.

 INNOVATIVE COMPONENTS	
TITLE: PANDID BV	
MODEL: LS 32-090	DRAWN BY: F.J.K
STOCK: <input checked="" type="checkbox"/>	DATE: 11/11/99
FILENAME: C:\NCK\PRINTS-32090\METRIC	SHEET: 1 OF 1
	SCALE: NONE
	REV.